

NOTES:

1. WHEN CLEANOUT IS OUTSIDE OF ROADWAY, SLOPE CONCRETE PAD AWAY FROM CASTING, AS SHOWN.
- 2.
3. USE THE FOLLOWING FRAME AND COVER OR APPROVED EQUIVALENTS:
 PINKERTON A-211 CAST IRON
 SOUTH BAY FOUNDRY B 11
 PHOENIX IRON WORKS P-7002
4. FOR ALTERNATE METHOD OF INSTALLATION, SEE FIGURE (A1).
5. TO ADJUST SEWER RISER PIPE FOR PROPER GRADE, A PORTION OF LONG RADIUS BEND MAY BE SAWCUT AND INSERTED INTO INLET FRAME AS SHOWN IN FIGURE (A1)



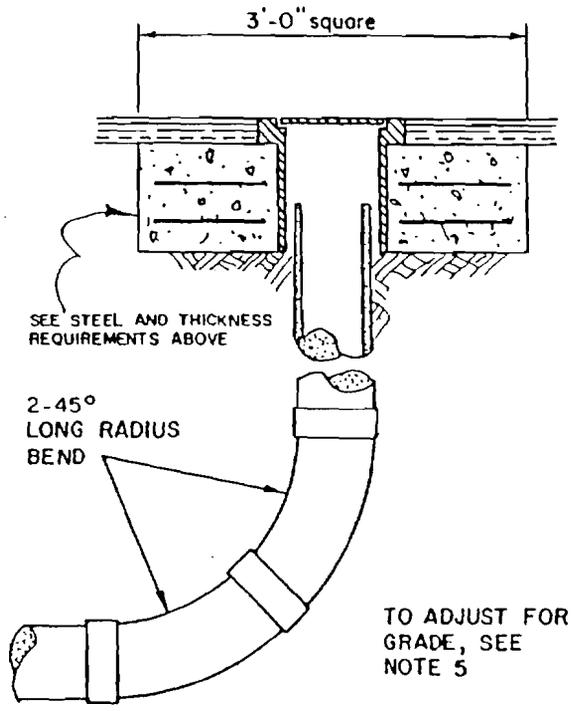


FIGURE (A1)

FOR THIS METHOD OF INSTALLATION, USE THE FOLLOWING FRAME AND COVER OR APPROVED EQUIVALENT:
 PHOENIX IRON WORKS P-2501
 ALL OTHER DIMENSIONS AND NOTES USED FOR STANDARD INSTALLATION METHOD APPLY TO FIGURE (A1)

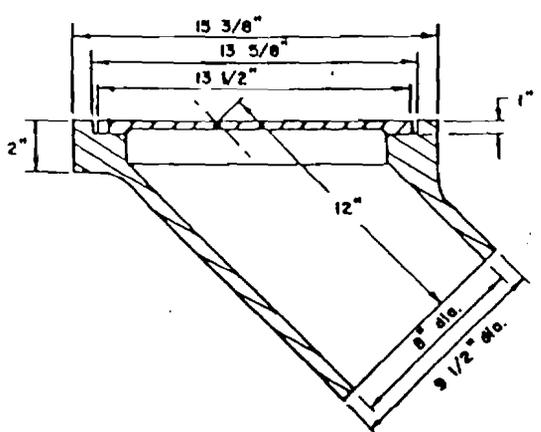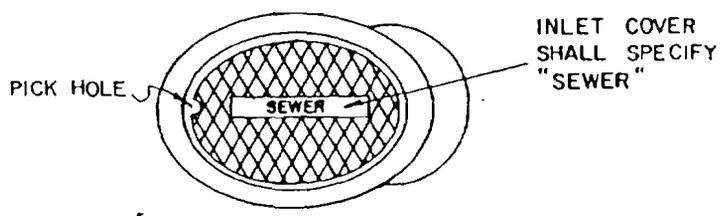

CITY OF UKIAH			
SEWER		CLEANOUT	
Scale: No Scale	Drawn By: ML	Approved By: 4/88	Drawing No.
Date: 1/4/87	Revised:	<i>R. Pedroncelli</i>	203